


# PEGUS P700H

As an automotive adhesive company **Pegus Systems** works closely with its clients to offer the best solution that will not only meet their adhesive needs, but also add value to their operation. We do this by providing reliable adhesives, complementary accessories, professional logistical services and personalized customer service.

**Pegus Systems** strives to create relationships of support and collaboration with our distributors. Our success is dependent on our distributor's success. We do all we can to ensure that our adhesives and sealant add value to their commercial strategy. Unlike our larger competitors, we're 100% focused on the automotive aftermarket replacement of windshields and auto-body sealing. We devote all our resources to this industry.

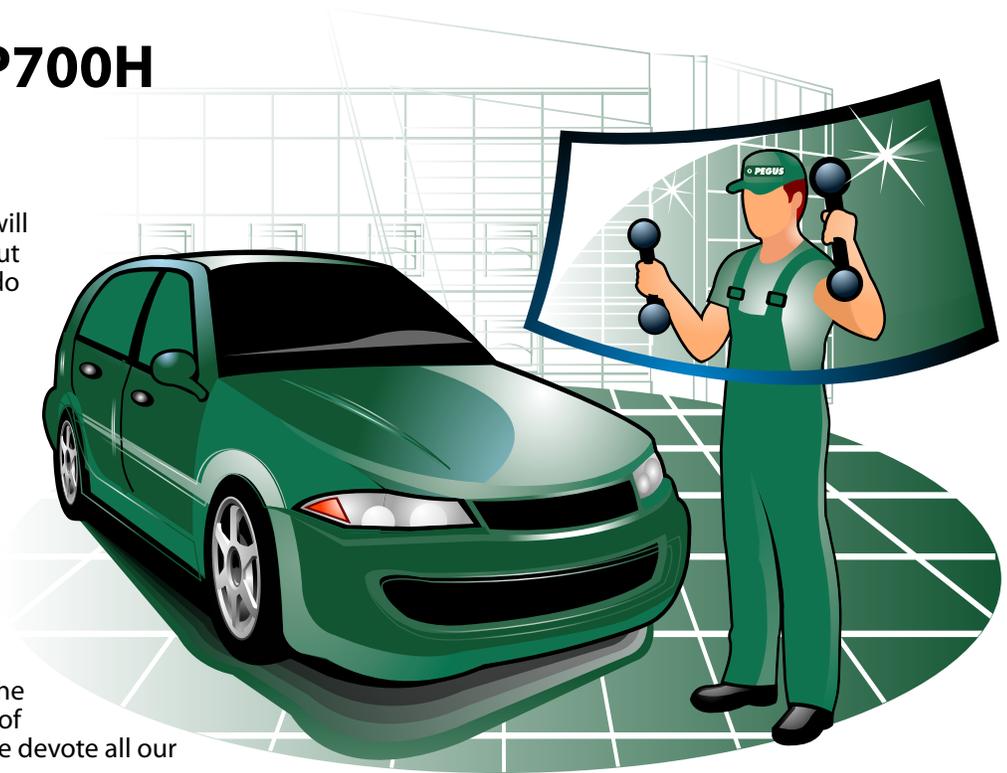

**P700H** is a high viscosity, single component polyurethane adhesive designed exclusively for the replacement of automotive windshields. It provides a strong option for replacement of the vehicle's original polyurethane bonding component. **P700H** is a two step adhesive system that achieves maximum adhesion when applied with our Pegus Combo Primer.



## P700H Characteristics

- ▶ Available in black.
- ▶ Available in 310 ml cartridges and also in 600 and 400 ml foil packs.
- ▶ Cartridges featuring easy-pull bottom seal.
- ▶ Safe Drive-Away Time Chart.

Single Air Bag (hrs.)					Passenger Air Bag (hrs.)						
Temp		Relative Humidity				Temp		Relative Humidity			
°F	°C	90%	75%	50%	25%	°F	°C	90%	75%	50%	25%
85	29	2	2	2	4	85	29	5	7	7	15
70	21	2	2	2	15	70	21	7	8	8	20
55	13	3	3	15	-	55	13	14	15	-	-



## Application Recommendations

- ▶ Windshield installation.
- ▶ Back light, quarter glass and other stationary glass application.
- ▶ Visit our website and review the TDS for installation instructions.



## Shelf Life

- ▶ P700H offers a twelve-month shelf life. Maximum shelf life is achieved only when the product is stored in an ambient temperature that does not exceed 23°C and 50% relative humidity.
- ▶ For maximum shelf life, avoid direct exposure to the sun for extended periods of time.
- ▶ Proper handling is required to avoid damage to the packaging which may cause moisture penetration and reduced shelf life.

# P700H



## Safety Procedures

- ▶ Avoid contact with skin and eyes. If eye contact occurs, flush out with water for 15 minutes and seek medical attention.
- ▶ Use in properly ventilated areas.
- ▶ Handle with proper safety equipment such as gloves and protective eyewear.
- ▶ Refer to the Material Safety Data Sheet for additional information.



## Pegus Promise

- ▶ Pegus Systems guarantees respectful collaboration with our distributors.
- ▶ Pegus Systems understands the importance of having reliable material and will provide product expiration information before shipping.
- ▶ Pegus Systems will use its extensive experience and knowledge of logistics to facilitate the most competitive delivery of our products to any port around the world.




## Accessories



### PEGUS SYSTEMS COMBO PRIMER

Combo primer for maximum adhesion. Protects against rust and offers a better UV resistance.



### WOOL DAUBER APPLICATORS

Variety of applicators available for convenient application of primer.



### AP200 REAR VIEW MIRROR ADHESIVE

Two component non spray rear view mirror adhesive. Over 200 applications in one kit. Excellent UV resistance.



### MODEL 250 HIGH EXTRUSION APPLICATOR

18:1 extrusion ratio. Excellent for high viscosity extrusion.



### HAP203 CUT-OUT WIRE

Braided strands for fast cutting. 21.9m per coil. Complete kits also available.